

# High Bay Lighting

## YML-1HB37L Series (Anti-glare Lighting)

Models passed DLC listed:  
YML-1HB37L-200  
YML-1HB37L-300




### Applications


Swimming pool, Badminton stadium, Basketball gym, Table tennis hall and other indoor arena, as well as shopping malls which need high anti-glare locations.

- Efficiency of chips: 150-165 lm/w, 180-195 lm/w
- LENS: Optical grade PC, anti-UV oxidation.
- Beam Angle: Type V
- Housing: die casting aluminum housing with excellent heat dissipation, surface treated with powder coated finish for corrosion and static resistance.
- Input voltage: 120-277 VAC, 277-480 VAC, 50/60 HZ
- LED module can be dismantled separately for maintenance.
- LED driver: constant current, efficiency is up to 92%, PF ≥ 0.95.
- IP class: IP 65

### Dimension [ Unit: Inch(mm) ]

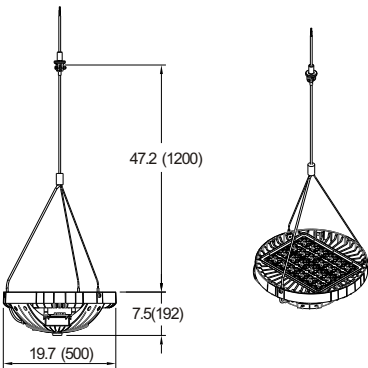

### Distribution Curve Flux



Type V

### Ordering Information

Example: YML-1HB37L-200-750-G-SR-5-1

Company code	Voltage	Type	Power	Ra	Colour Temp.	Colour Options	Mounting	Optic	Options
YML	1 120~277VAC	HB37L	200 (200W 23400Lumens)	7	27	S	SR Steel Rope	5 Type V	1 0~10V dimming 2 Timing dimming 3 Occupancy sensor (dimming control/ on off control)
	2 200~240VAC		200P (200W 32100Lumens)	70	2700K	B			
	3 100~120VAC		240 (240W 26150Lumens)	8	30	C			
	4 277~480VAC		240P (240W 36700Lumens)	80	3000K	G			
	5 347~480VAC		300 (300W 35400Lumens)	9	40				
			300P (300W 45100Lumens)	90	4000K				
			400 (400W 44000Lumens)		50				
			400P (400W 48400Lumens)		5000K				
			500 (500W 54000Lumens)		5700K				
					6500K				