

## Shoe Box Lighting

### YML-1SB31 Series

Models passed DLC listed:  
 YML-1SB31-150, YML-1SB31-300  
 YML-1SB31-240, YML-1SB31-260-2  
 YML-1SB31-300-2



### Mounting Mode Options




### Applications


Parking lots, pedestrian walkways, roadways and other outdoor applications.

- Efficiency of chips: 150-165 lm/w, 180-195 lm/w
- LENS: Optical grade PC, anti-UV oxidation.
- Beam Angle: Type I, Type II, Type III, Type IV, Type V.
- Housing: die casting aluminum housing with excellent heat dissipation, surface treated with powder coated finish for corrosion and static resistance.
- Input voltage: 100-277 VAC, 277~480VAC, 50/60 HZ
- LED module can be dismantled separately for maintenance.
- LED driver: constant current, efficiency is up to 92%, PF ≥ 0.95.
- IP class: IP65

### Dimension [ Unit: Inch(mm) ]

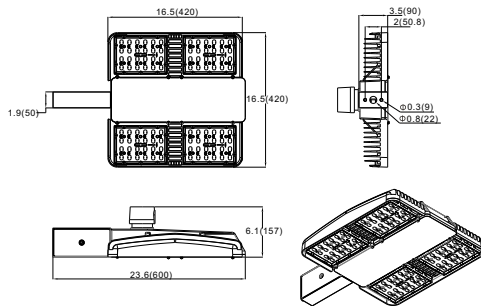

### Distribution Curve Flux

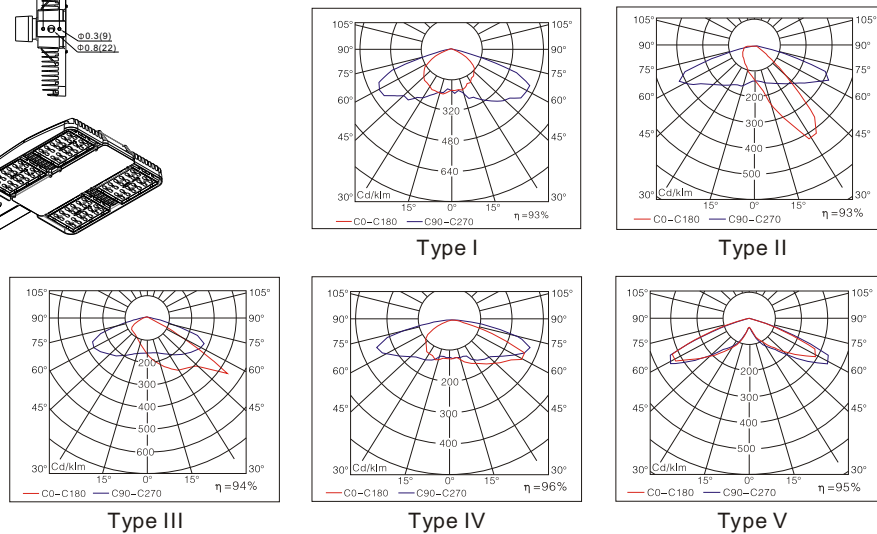

### Ordering Information

Example: YML-1SB31-150-750-C-E7-3-1

Company code	Voltage	Type	Power	Ra	Colour Temp.	Colour Options	Mounting	Optic	Options
YML	1 120~277VAC	SB 31	150 (150W 19200Lumens)	7	27	C	S	1	1
	2 200~240VAC		150P (150W 23700Lumens)	70	2700K	Coffee (standard)	Slip flitter	Type I	0~10V dimming
	3 100~120VAC		200 (200W 23400Lumens)	8	30	B	U bracket	2	Timing dimming
	4 277~480VAC		200P (200W 32000Lumens)	80	3000K	Black	E7	3	Occupancy sensor
	5 347~480VAC		240 (240W 26150Lumens)	9	40	S	Straight arm	Type III	(dimming control/ on off control)
		240P (240W 37400Lumens)	90	4000K	Silver	E7B	4		
		300 (300W 35400Lumens)		50		Straight arm+ fixing seat	Type IV		
		300P (300W 45500Lumens)		57		E8	5	Photocell	
				65		Straight arm	Type V	5	Wireless
				6500K					